


Positionable Male Elbows

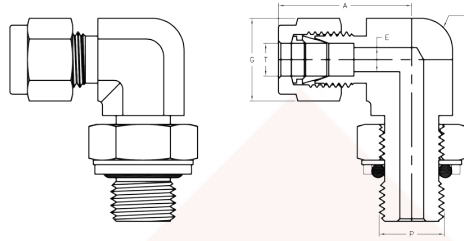

Fractional tube to BSP/ISO parallel (PR)

RELYLOK Basic Part No.	T Tube O.D.	P BSP/ISOP Thread	A in. [mm]	E in. [mm]	F Hex	Fx Hex	G Hex
-4-21-2PR	1/4	1/8	1.06 [26.9]	0.16 [4.1]	1/2	9/16	9/16
-4-21-4PR		1/4	1.14 [29]	0.19 [4.8]	9/16	3/4	
-6-21-4PR	3/8	1/4	1.20 [30.5]	0.23 [5.8]	5/8	3/4	11/16
-6-21-6PR		3/8	1.31 [33.3]	0.28 [7.1]	13/16	7/8	
-8-21-4PR	1/2	1/4	1.42 [36.1]	0.23 [5.8]	13/16	3/4	7/8
-8-21-6PR		3/8		0.31 [7.9]		7/8	
-8-21-8PR		1/2	1.50 [38.1]	0.41 [10.4]	7/8	1 1/16	
-10-21-8PR	5/8	1/2	1.50 [38.1]	0.47 [11.9]	15/16	1 1/16	1
-12-21-8PR	3/4	1/2	1.57 [39.9]	0.47 [11.9]	1 1/16	1 1/16	1 1/8
-12-21-12PR		3/4		0.62 [15.7]		1 3/8	
-16-21-12PR		1	3/4	1.93 [49]	0.62 [15.7]	1 3/8	
-16-21-16PR	1		0.78 [19.8]		1 5/8		

Metric tube to BSP/ISO parallel (PR)

RELYLOK Basic Part No.	T Tube O.D.	P BSP/ISOP Thread (in.)	A mm.	E mm.	F Hex (in.)	Fx Hex	G Hex
-M6-21-2PR	6	1/8	27.0	4.0	1/2	14	14
-M6-21-4PR		1/4	29.0	4.8	9/16	19	
-M8-21-2PR	8	1/8	28.8	4.0	9/16	14	16
-M8-21-4PR		1/4	29.9	5.9	5/8	19	
-M10-21-4PR	10	1/4	33.5	5.9	11/16	19	19
-M10-21-6PR		3/8		7.9	13/16	22	
-M12-21-4PR	12	1/4	36.0	5.9	13/16	14	22
-M12-21-6PR		3/8		7.9		22	
-M12-21-8PR		1/2	38.0	9.5	7/8	27	
-M12-21-12PR		3/4	39.8		1 1/16	36	

See Ordering Information and Technical Specifications on page 4.