


## Hex Long Nipples

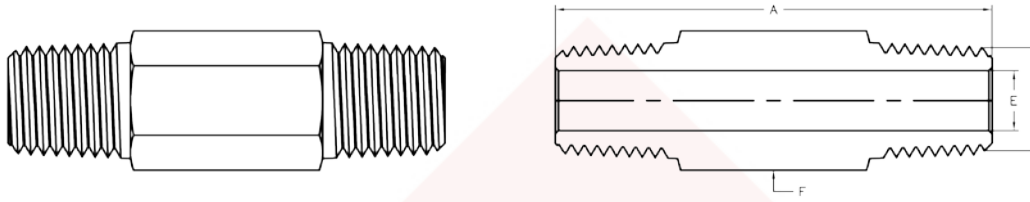

### Male NPT

RELYLOK Basic Part No.	P - Male NPT in.	A Available Lengths (in.)						E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
		1.50	2.00	2.50	3.00	4.00	6.00			SS & CS	Brass
		-1-HLN-	1/16	✓	✓	✓	NA				
-2-HLN-	1/8	✓	✓	✓	✓	NA	NA	0.19 [4.8]	7/16	10000 [689]	5000 [345]
-4-HLN-	1/4	✓	✓	✓	✓	✓	✓	0.28 [7.1]	9/16	8000 [552]	4000 [276]
-6-HLN-	3/8	✓	✓	✓	✓	✓	NA	0.38 [9.7]	11/16	7800 [538]	3900 [269]
-8-HLN-	1/2	NA	✓	✓	✓	✓	✓	0.47 [11.9]	7/8	7700 [531]	3850 [265]
-12-HLN-	3/4	NA	✓	✓	✓	✓	✓	0.62 [15.7]	1-1/16	7300 [503]	3650 [252]
-16-HLN-	1	NA	NA	✓	✓	✓	✓	0.88 [22.4]	1-3/8	5300 [365]	2650 [183]

### Male BSP/ISO taper (PT)

RELYLOK Basic Part No.	P - Male BSPT/ISOT in.	A Available Lengths (in.)						E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
		1.50	2.00	2.50	3.00	4.00	6.00			SS & CS	Brass
		-1PT-HLN-	1/16	✓	✓	✓	NA				
-2PT-HLN-	1/8	✓	✓	✓	✓	NA	NA	0.19 [4.8]	7/16	10000 [689]	5000 [345]
-4PT-HLN-	1/4	✓	✓	✓	✓	✓	✓	0.28 [7.1]	9/16	8000 [552]	4000 [276]
-6PT-HLN-	3/8	✓	✓	✓	✓	✓	NA	0.38 [9.7]	11/16	7800 [538]	3900 [269]
-8PT-HLN-	1/2	NA	✓	✓	✓	✓	✓	0.47 [11.9]	7/8	7700 [531]	3850 [265]
-12PT-HLN-	3/4	NA	✓	✓	✓	✓	✓	0.62 [15.7]	1-1/16	7300 [503]	3650 [252]
-16PT-HLN-	1	NA	NA	✓	✓	✓	✓	0.88 [22.4]	1-3/8	5300 [365]	2650 [183]

To order, add the length shown in inches to the basic part number. Example: -4-HLN-3.00.