


Positionable Male Run Tees

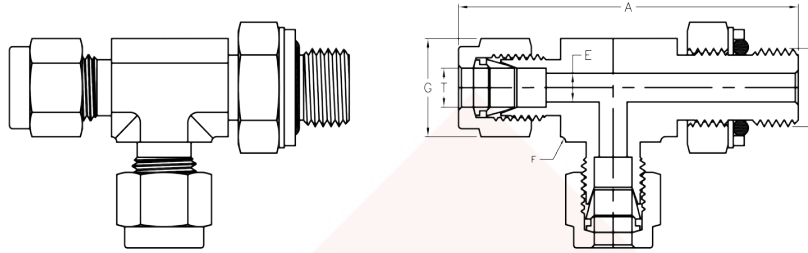

Fractional tube to BSP/ISO parallel (PR)

RELYLOK Basic Part No.	T Tube O.D.	P BSP/ISOP Thread	A in. [mm]	E in. [mm]	F Hex	Fx Hex	G Hex
-4-31R-2PR	1/4	1/8	2.10 [53.3]	0.16 [4.1]	1/2	9/16	9/16
-4-31R-4PR		1/4	2.41 [61.2]	0.19 [4.8]	9/16	3/4	
-6-31R-4PR	3/8	1/4	2.47 [62.7]	0.23 [5.8]	5/8	3/4	11/16
-8-31R-6PR	1/2	3/8	2.88 [73.2]	0.31 [7.9]	13/16	7/8	7/8
-8-31R-8PR		1/2	3.21 [81.5]	0.41 [10.4]	7/8	1 1/16	
-10-31R-8PR	5/8	1/2	3.21 [81.5]	0.47 [11.9]	15/16	1 1/16	1
-12-31R-8PR	3/4	1/2	3.35 [85.1]	0.47 [11.9]	1 1/16	1 1/16	1 1/8
-12-31R-12PR		3/4	3.49 [88.6]	0.62 [15.7]		1 3/8	
-16-31R-16PR	1	1	4.04 [102.6]	0.78 [19.8]	1 3/8	1 5/8	1 1/2

Metric tube to BSP/ISO parallel (PR)

RELYLOK Basic Part No.	T Tube O.D.	P BSP/ISOP Thread (in.)	A mm.	E mm.	F Hex (in.)	Fx Hex	G Hex
-M6-31R-2PR	6	1/8	53.4	4.0	1/2	14	14
-M6-31R-4PR		1/4	61.2	4.8	9/16	19	
-M8-31R-2PR	8	1/8	56.3	4.0	9/16	14	16
-M8-31R-4PR		1/4	62.1	6.4	5/8	19	
-M10-31R-4PR	10	1/4	68.6	5.9	13/16	19	19
-M12-31R-6PR	12	3/8	73.1	7.9	13/16	22	22
-M12-31R-8PR		1/2	81.5	9.5	7/8	27	

See Ordering Information and Technical Specifications on page 2.