


Pipe Elbows

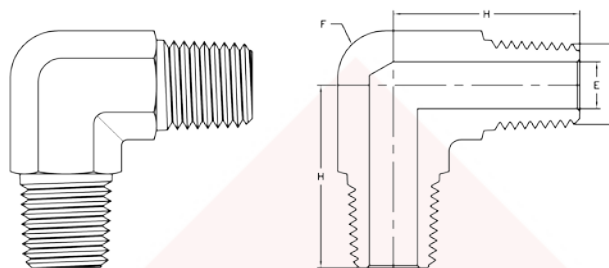

Male NPT

| RELYLOK Basic Part No. | P - Male NPT in. | H in. [mm] | E in. [mm] | F Hex | Max. Working Pressure psig [bar] | |
|------------------------------|------------------------|---------------|---------------|----------|-------------------------------------|------------|
| | | | | | SS & CS | Brass |
| -1-ME | 1/16 | 0.66 [16.8] | 0.12 [3] | 3/8 | 9500 [655] | 4750 [327] |
| -2-ME | 1/8 | 0.76 [19.3] | 0.19 [4.8] | 7/16 | 9100 [627] | 4550 [314] |
| -4-ME | 1/4 | 1.09 [27.7] | 0.28 [7.1] | 9/16 | 7500 [517] | 3750 [259] |
| -6-ME | 3/8 | 1.22 [31] | 0.38 [9.7] | 11/16 | 7200 [496] | 3600 [248] |
| -8-ME | 1/2 | 1.47 [37.3] | 0.47 [11.9] | 7/8 | 5800 [400] | 2900 [200] |
| -12-ME | 3/4 | 1.59 [40.4] | 0.62 [15.7] | 1-1/16 | 6400 [441] | 3200 [221] |
| -16-ME | 1 | 1.97 [50] | 0.88 [22.4] | 1-3/8 | 4600 [317] | 2300 [159] |

Male BSP/ISO taper (PT)

| RELYLOK Basic Part No. | P - Male BSPT/ISOT in. | H in. [mm] | E in. [mm] | F Hex | Max. Working Pressure psig [bar] | |
|------------------------------|------------------------------|---------------|---------------|----------|-------------------------------------|------------|
| | | | | | SS & CS | Brass |
| -1PT-ME | 1/16 | 0.66 [16.8] | 0.12 [3] | 3/8 | 9500 [655] | 4750 [327] |
| -2PT-ME | 1/8 | 0.76 [19.3] | 0.19 [4.8] | 7/16 | 9100 [627] | 4550 [314] |
| -4PT-ME | 1/4 | 1.09 [27.7] | 0.28 [7.1] | 9/16 | 7500 [517] | 3750 [259] |
| -6PT-ME | 3/8 | 1.22 [31] | 0.38 [9.7] | 11/16 | 7200 [496] | 3600 [248] |
| -8PT-ME | 1/2 | 1.47 [37.3] | 0.47 [11.9] | 7/8 | 5800 [400] | 2900 [200] |
| -12PT-ME | 3/4 | 1.59 [40.4] | 0.62 [15.7] | 1-1/16 | 6400 [441] | 3200 [221] |
| -16PT-ME | 1 | 1.97 [50] | 0.88 [22.4] | 1-3/8 | 4600 [317] | 2300 [159] |

See Ordering Information and Technical Specifications on page 2.