


## Close Nipples

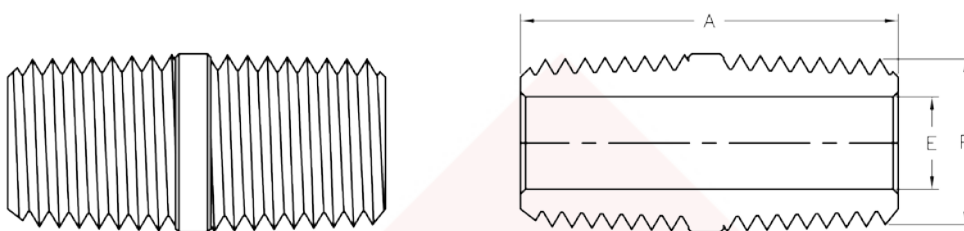

### Male NPT

RELYLOK Basic Part No.	P - Male NPT in.	A in. [mm]	E in. [mm]	Max. Working Pressure psig [bar]	
				SS & CS	Brass
-1-CN	1/16	0.75 [19.1]	0.12 [3]	11000 [758]	5500 [379]
-2-CN	1/8	0.75 [19.1]	0.19 [4.8]	10000 [689]	5000 [345]
-4-CN	1/4	1.12 [28.4]	0.28 [7.1]	8000 [552]	4000 [276]
-6-CN	3/8	1.12 [28.4]	0.38 [9.7]	7800 [538]	3900 [269]
-8-CN	1/2	1.50 [38.1]	0.47 [11.9]	7700 [531]	3850 [265]
-12-CN	3/4	1.50 [38.1]	0.62 [15.7]	7300 [503]	3650 [252]
-16-CN	1	1.88 [47.8]	0.88 [22.4]	5300 [365]	2650 [183]

### Male BSP/ISO taper (PT)

RELYLOK Basic Part No.	P - Male BSPT/ISOT in.	A in. [mm]	E in. [mm]	Max. Working Pressure psig [bar]	
				SS & CS	Brass
-1PT-CN	1/16	0.75 [19.1]	0.12 [3]	11000 [758]	5500 [379]
-2PT-CN	1/8	0.75 [19.1]	0.19 [4.8]	10000 [689]	5000 [345]
-4PT-CN	1/4	1.12 [28.4]	0.28 [7.1]	8000 [552]	4000 [276]
-6PT-CN	3/8	1.12 [28.4]	0.38 [9.7]	7800 [538]	3900 [269]
-8PT-CN	1/2	1.50 [38.1]	0.47 [11.9]	7700 [531]	3850 [265]
-12PT-CN	3/4	1.50 [38.1]	0.62 [15.7]	7300 [503]	3650 [252]
-16PT-CN	1	1.88 [47.8]	0.88 [22.4]	5300 [365]	2650 [183]

See Ordering Information and Technical Specifications on page 2.