


## Hex Couplings

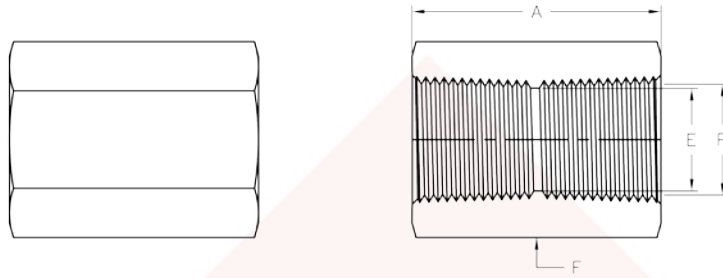

### Female NPT

RELYLOK Basic Part No.	P - Female NPT in.	A in. [mm]	E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
					SS & CS	Brass
-1-HCG	1/16	0.75 [19.1]	0.25 [6.4]	1/2	7500 [517]	3750 [259]
-2-HCG	1/8	0.75 [19.1]	0.34 [8.6]	9/16	6500 [448]	3250 [224]
-4-HCG	1/4	1.13 [28.7]	0.45 [11.4]	3/4	6600 [455]	3300 [228]
-6-HCG	3/8	1.13 [28.7]	0.59 [15]	7/8	5300 [365]	2650 [183]
-8-HCG	1/2	1.50 [38.1]	0.73 [18.5]	1-1/16	4900 [338]	2450 [169]
-12-HCG	3/4	1.53 [38.9]	0.94 [23.9]	1-5/16	4600 [317]	2300 [159]
-16-HCG	1	1.89 [48]	1.17 [29.7]	1-5/8	4400 [303]	2200 [152]
-20-HCG	1-1/4	1.94 [49.3]	1.50 [38.1]	2	3500 [241]	1750 [121]
-24-HCG	1-1/2	1.94 [49.3]	1.73 [43.9]	2-3/8	3200 [221]	1600 [110]
<b>10000 psig [689 bar]</b>						
-4-HCG-XK	1/4	1.19 [30.2]	0.45 [11.4]	1	10000 [689]	NA
-8-HCG-XK	1/2	1.56 [39.6]	0.73 [18.5]	1-1/2		

### Female BSP/ISO taper (PT)

RELYLOK Basic Part No.	P - Female BSPT/ISOT in.	A in. [mm]	E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
					SS & CS	Brass
-1PT-HCG	1/16	0.75 [19.1]	0.25 [6.4]	1/2	7500 [517]	3750 [259]
-2PT-HCG	1/8	0.75 [19.1]	0.34 [8.6]	9/16	6500 [448]	3250 [224]
-4PT-HCG	1/4	1.13 [28.7]	0.45 [11.4]	3/4	6600 [455]	3300 [228]
-6PT-HCG	3/8	1.13 [28.7]	0.59 [15]	7/8	5300 [365]	2650 [183]
-8PT-HCG	1/2	1.50 [38.1]	0.73 [18.5]	1-1/16	4900 [338]	2450 [169]
-12PT-HCG	3/4	1.53 [38.9]	0.94 [23.9]	1-5/16	4600 [317]	2300 [159]
-16PT-HCG	1	1.89 [48]	1.17 [29.7]	1-5/8	4400 [303]	2200 [152]
-20PT-HCG	1-1/4	1.94 [49.3]	1.50 [38.1]	2	3500 [241]	1750 [121]
-24PT-HCG	1-1/2	1.94 [49.3]	1.73 [43.9]	2-3/8	3200 [221]	1600 [110]
<b>10000 psig [689 bar]</b>						
-4PT-HCG-XK	1/4	1.19 [30.2]	0.45 [11.4]	1	10000 [689]	NA
-8PT-HCG-XK	1/2	1.56 [39.6]	0.73 [18.5]	1-1/2		

See Ordering Information and Technical Specifications on page 2.