


Pipe Caps

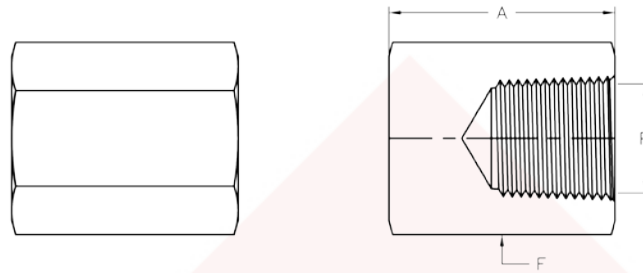

Female NPT

RELYLOK Basic Part No.	P - Female NPT in.	A in. [mm]	F Hex	Max. Working Pressure psig [bar]	
				SS & CS	Brass
-1-CP	1/16	0.50 [12.7]	7/16	7500 [517]	3750 [259]
-2-CP	1/8	0.75 [19.1]	9/16	6400 [441]	3200 [221]
-4-CP	1/4	0.91 [23.1]	3/4	6600 [455]	3300 [228]
-6-CP	3/8	1.03 [26.2]	7/8	5300 [365]	2650 [183]
-8-CP	1/2	1.34 [34]	1-1/16	5200 [359]	2600 [179]
-12-CP	3/4	1.44 [36.6]	1-3/8	4300 [296]	2150 [148]
-16-CP	1	1.62 [41.1]	1-5/8	4500 [310]	2250 [155]
-20-CP	1-1/4	2.00 [50.8]	2-1/8	3000 [207]	1500 [103]
-24-CP	1-1/2	2.06 [52.3]	2-3/8	2400 [165]	1200 [83]
-32-CP	2	2.17 [55.1]	2-7/8	1800 [124]	900 [62]
10000 psig [689 bar]					
-4-CP-XK	1/4	1.11 [28.2]	1	10000 [689]	NA
-8-CP-XK	1/2	1.58 [40.1]	1-1/2		

Female BSP/ISO taper (PT)

RELYLOK Basic Part No.	P - Female BSPT/ISOT in.	A in. [mm]	F Hex	Max. Working Pressure psig [bar]	
				SS & CS	Brass
-1PT-CP	1/16	0.50 [12.7]	7/16	7500 [517]	3750 [259]
-2PT-CP	1/8	0.75 [19.1]	9/16	6400 [441]	3200 [221]
-4PT-CP	1/4	0.91 [23.1]	3/4	6600 [455]	3300 [228]
-6PT-CP	3/8	1.03 [26.2]	7/8	5300 [365]	2650 [183]
-8PT-CP	1/2	1.34 [34]	1-1/16	5200 [359]	2600 [179]
-12PT-CP	3/4	1.44 [36.6]	1-3/8	4300 [296]	2150 [148]
-16PT-CP	1	1.62 [41.1]	1-5/8	4500 [310]	2250 [155]
-20PT-CP	1-1/4	2.00 [50.8]	2-1/8	3000 [207]	1500 [103]
-24PT-CP	1-1/2	2.06 [52.3]	2-3/8	2400 [165]	1200 [83]
-32PT-CP	2	2.17 [55.1]	2-7/8	1800 [124]	900 [62]
10000 psig [689 bar]					
-4PT-CP-XK	1/4	1.11 [28.2]	1	10000 [689]	NA
-8PT-CP-XK	1/2	1.58 [40.1]	1-1/2		

See Ordering Information and Technical Specifications on page 2.