


Male Elbows - 45 degree

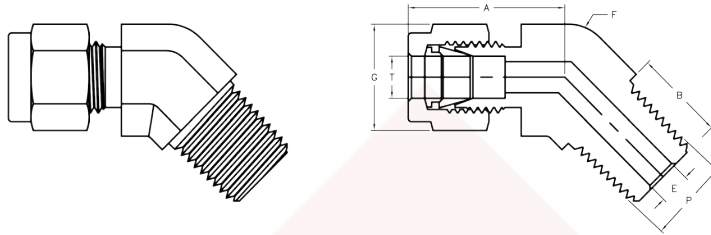

Fractional tube to NPT

RELYLOK Basic Part No.	T Tube O.D.	P NPT Thread	A in. [mm]	B in. [mm]	E in. [mm]	F Hex	G Hex
-1-2145-1	1/16	1/16	0.62 [15.7]	0.38 [9.7]	0.05 [1.3]	5/16	5/16
-2-2145-2	1/8	1/8	0.79 [20.1]	0.38 [9.7]	0.09 [2.3]	7/16	7/16
-3-2145-2	3/16	1/8	0.82 [20.8]	0.38 [9.7]	0.12 [3]	7/16	1/2
-4-2145-2	1/4	1/8	0.97 [24.6]	0.38 [9.7]	0.19 [4.8]	1/2	9/16
-4-2145-4		1/4		0.56 [14.2]		9/16	
-5-2145-2	5/16	1/8	1.01 [25.7]	0.38 [9.7]	0.19 [4.8]	9/16	5/8
-6-2145-2	3/8	1/8	1.10 [27.9]	0.38 [9.7]	0.19 [4.8]	5/8	11/16
-6-2145-4		1/4					
-6-2145-6		3/8	1.15 [29.2]	11/16			
-8-2145-6	1/2	3/8	1.26 [32]	0.56 [14.2]	0.38 [9.7]	13/16	7/8
-8-2145-8		1/2		0.75 [19.1]	0.41 [10.4]	7/8	
-10-2145-8	5/8	1/2	1.30 [33]	0.75 [19.1]	0.47 [11.9]	15/16	1
-12-2145-12	3/4	3/4	1.33 [33.8]	0.75 [19.1]	0.62 [15.7]	1 1/16	1 1/8
-14-2145-12	7/8	3/4	1.38 [35.1]	0.75 [19.1]	0.62 [15.7]	1 3/16	1 1/4
-16-2145-16	1	1	1.59 [40.4]	0.94 [23.9]	0.88 [22.4]	1 3/8	1 1/2

Metric tube to NPT

RELYLOK Basic Part No.	T Tube O.D.	P NPT Thread (in.)	A mm.	B mm.	E mm.	F Hex (in.)	G Hex
-M6-2145-2	6	1/8	24.6	9.7	4.8	1/2	14
-M6-2145-4		1/4		14.2	7.1	9/16	
-M8-2145-2	8	1/8	25.7	9.7	4.8	9/16	16
-M10-2145-4	10	1/4	29.2	14.2	7.1	11/16	19
-M10-2145-6		3/8			7.9		
-M12-2145-6	12	3/8	32.0	14.2	9.5	13/16	22
-M12-2145-8		1/2		19.1		7/8	
-M16-2145-8	16	1/2	33.0	19.1	11.9	15/16	25

See Ordering Information and Technical Specifications on page 4.