


Pipe Tees

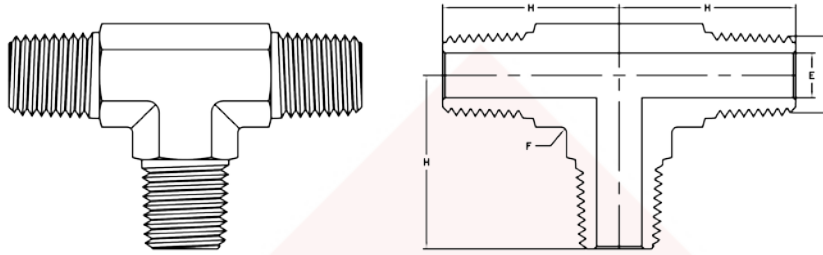

Male NPT

RELYLOK Basic Part No.	P - Male NPT in.	H in. [mm]	E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
					SS & CS	Brass
-1-MT	1/16	0.66 [16.8]	0.12 [3]	3/8	9500 [655]	4750 [327]
-2-MT	1/8	0.76 [19.3]	0.19 [4.8]	7/16	9100 [627]	4550 [314]
-4-MT	1/4	1.09 [27.7]	0.28 [7.1]	9/16	7500 [517]	3750 [259]
-6-MT	3/8	1.22 [31]	0.38 [9.7]	11/16	7200 [496]	3600 [248]
-8-MT	1/2	1.47 [37.3]	0.47 [11.9]	7/8	5800 [400]	2900 [200]
-12-MT	3/4	1.59 [40.4]	0.62 [15.7]	1-1/16	6400 [441]	3200 [221]
-16-MT	1	1.97 [50]	0.88 [22.4]	1-3/8	4600 [317]	2300 [159]

Male BSP/ISO taper (PT)

RELYLOK Basic Part No.	P - Male BSPT/ISOT in.	H in. [mm]	E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
					SS & CS	Brass
-1PT-MT	1/16	0.66 [16.8]	0.12 [3]	3/8	9500 [655]	4750 [327]
-2PT-MT	1/8	0.76 [19.3]	0.19 [4.8]	7/16	9100 [627]	4550 [314]
-4PT-MT	1/4	1.09 [27.7]	0.28 [7.1]	9/16	7500 [517]	3750 [259]
-6PT-MT	3/8	1.22 [31]	0.38 [9.7]	11/16	7200 [496]	3600 [248]
-8PT-MT	1/2	1.47 [37.3]	0.47 [11.9]	7/8	5800 [400]	2900 [200]
-12PT-MT	3/4	1.59 [40.4]	0.62 [15.7]	1-1/16	6400 [441]	3200 [221]
-16PT-MT	1	1.97 [50]	0.88 [22.4]	1-3/8	4600 [317]	2300 [159]

See Ordering Information and Technical Specifications on page 2.