


## Pipe Plugs

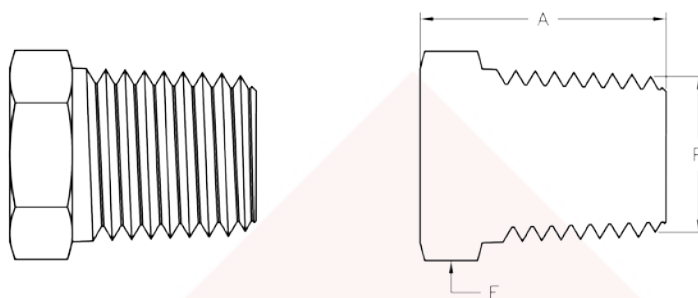

### Male NPT


RELYLOK Basic Part No.	P - Male NPT in.	A in. [mm]	F Hex	Max. Working Pressure psig [bar]	
				SS & CS	Brass
-1-HP	1/16	0.54 [13.7]	3/8	10500 [724]	5250 [362]
-2-HP	1/8	0.56 [14.2]	7/16	9700 [669]	4850 [334]
-4-HP	1/4	0.75 [19.1]	9/16	8000 [552]	4000 [276]
-6-HP	3/8	0.78 [19.8]	11/16	7600 [524]	3800 [262]
-8-HP	1/2	0.97 [24.6]	7/8	7000 [483]	3500 [241]
-12-HP	3/4	1.06 [26.9]	1-1/16	6800 [469]	3400 [234]
-16-HP	1	1.25 [31.8]	1-3/8	4900 [338]	2450 [169]
-20-HP	1-1/4	1.34 [34]	1-3/4	3200 [221]	1600 [110]
-24-HP	1-1/2	1.50 [38.1]	2-1/8	2600 [179]	1300 [90]
-32-HP	2	1.72 [43.7]	2-3/4	2000 [138]	1000 [69]

### Male BSP/ISO taper (PT)

RELYLOK Basic Part No.	P - Male BSPT/ISOT in.	A in. [mm]	F Hex	Max. Working Pressure psig [bar]	
				SS & CS	Brass
-1PT-HP	1/16	0.54 [13.7]	3/8	10500 [724]	5250 [362]
-2PT-HP	1/8	0.56 [14.2]	7/16	9700 [669]	4850 [334]
-4PT-HP	1/4	0.75 [19.1]	9/16	8000 [552]	4000 [276]
-6PT-HP	3/8	0.78 [19.8]	11/16	7600 [524]	3800 [262]
-8PT-HP	1/2	0.97 [24.6]	7/8	7000 [483]	3500 [241]
-12PT-HP	3/4	1.06 [26.9]	1-1/16	6800 [469]	3400 [234]
-16PT-HP	1	1.25 [31.8]	1-3/8	4900 [338]	2450 [169]
-20PT-HP	1-1/4	1.34 [34]	1-3/4	3200 [221]	1600 [110]
-24PT-HP	1-1/2	1.50 [38.1]	2-1/8	2600 [179]	1300 [90]
-32PT-HP	2	1.72 [43.7]	2-3/4	2000 [138]	1000 [69]

See Ordering Information and Technical Specifications on page 2.

## Pipe Plugs

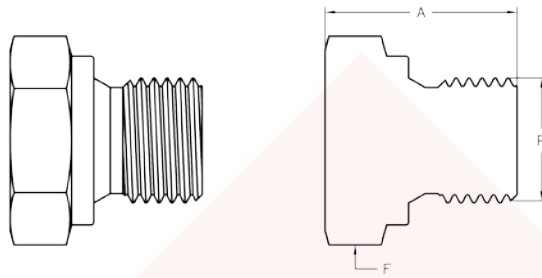


### Male BSP/ISO parallel (PS)

RELYLOK Basic Part No.	P - Male BSP/ISOP in.	A in. [mm]	F Hex	Max. Working Pressure psig [bar]	
				SS & CS	Brass
-2PS-HP	1/8	0.55 [14]	9/16	9100 [627]	4550 [314]
-4PS-HP	1/4	0.78 [19.8]	3/4	7500 [517]	3750 [259]
-6PS-HP	3/8	0.78 [19.8]	7/8	7200 [496]	3600 [248]
-8PS-HP	1/2	0.99 [25.1]	1-1/16	6600 [455]	3300 [228]
-12PS-HP	3/4	1.13 [28.7]	1-1/4	6400 [441]	3200 [221]
-16PS-HP	1	1.21 [30.7]	1-5/8	4600 [317]	2300 [159]
-20PS-HP	1-1/4	1.34 [34]	1-3/4	3000 [207]	1500 [103]
-24PS-HP	1-1/2	1.50 [38.1]	2-1/8	2400 [165]	1200 [83]
-32PS-HP	2	1.72 [43.7]	2-3/4	1800 [124]	900 [62]

PS designated BSP/ISO parallel threads require a gasket for sealing. See page 36 for PS gaskets.

## Plugs

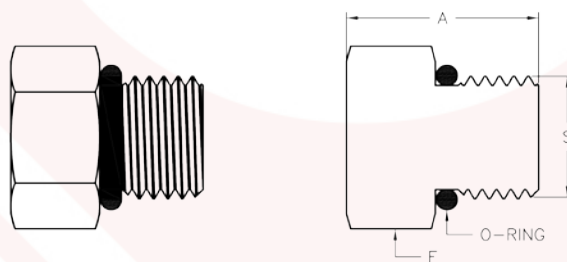

### Male SAE/MS (S)

RELYLOK Basic Part No.	S - Male SAE/MS in.	A in. [mm]	F Hex	Max. Working Pressure psig [bar]	
				SS & CS	Brass
-4S-HP	7/16-20	0.67 [17]	3/8	7200 [496]	3600 [248]
-6S-HP	9/16-18	0.73 [18.5]	7/16	7200 [496]	3600 [248]
-8S-HP	3/4-16	0.80 [20.3]	9/16	7200 [496]	3600 [248]
-12S-HP	1 1/16-12	1.09 [27.7]	11/16	7200 [496]	3600 [248]
-16S-HP	1 5/16-12	1.13 [28.7]	7/8	6600 [455]	3300 [228]

See Ordering Information and Technical Specifications on page 2.