


Reducing Adapters

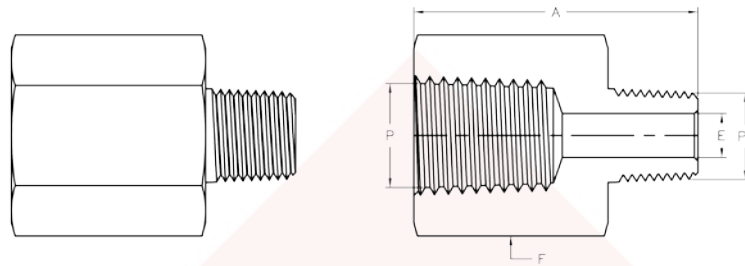


Female to Male NPT

RELYLOK Basic Part No.	P - Female NPT in.	P1 - Male NPT in.	A in. [mm]	E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
						SS & CS	Brass
-2-RA-1	1/8	1/16	1.03 [26.2]	0.12 [3]	9/16	6500 [448]	3250 [224]
-4-RA-1	1/4	1/16	1.20 [30.5]	0.12 [3]	3/4	6600 [455]	3300 [228]
-4-RA-2		1/8		0.19 [4.8]			
-6-RA-1	3/8	1/16	1.25 [31.8]	0.12 [3]	7/8	5300 [365]	2650 [183]
-6-RA-2		1/8		0.19 [4.8]			
-6-RA-4		1/4	0.28 [7.1]				
-8-RA-2	1/2	1/8	1.50 [38.1]	0.19 [4.8]	1-1/16	4900 [338]	2450 [169]
-8-RA-4		1/4		0.28 [7.1]			
-8-RA-6		3/8	0.38 [9.7]				
-12-RA-2	3/4	1/8	1.56 [39.6]	0.19 [4.8]	1-5/16	4600 [317]	2300 [159]
-12-RA-4		1/4		0.28 [7.1]			
-12-RA-6		3/8	0.38 [9.7]				
-12-RA-8		1/2	0.47 [11.9]				
-16-RA-2	1	1/8	1.81 [46]	0.19 [4.8]	1-5/8	4400 [303]	2200 [152]
-16-RA-4		1/4		0.28 [7.1]			
-16-RA-6		3/8	0.38 [9.7]				
-16-RA-8		1/2	0.47 [11.9]				
-16-RA-12		3/4	0.62 [15.7]				
-20-RA-16	1-1/4	1	2.47 [62.7]	0.88 [22.4]	2	3500 [241]	1750 [121]

See Ordering Information and Technical Specifications on page 2.

Reducing Adapters

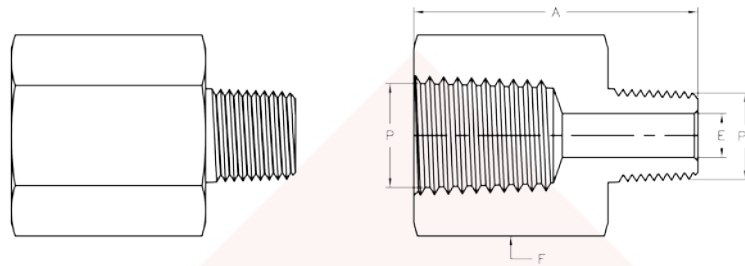

Female to Male BSP/ISO taper (PT)

RELYLOK Basic Part No.	P - Female BSPT/ISOT in.	P1 - Male BSPT/ISOT in.	A in. [mm]	E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
						SS & CS	Brass
-2PT-RA-1PT	1/8	1/16	1.03 [26.2]	0.12 [3]	9/16	6500 [448]	3250 [224]
-4PT-RA-1PT	1/4	1/16	1.20 [30.5]	0.12 [3]	3/4	6600 [455]	3300 [228]
-4PT-RA-2PT		1/8		0.19 [4.8]			
-6PT-RA-1PT	3/8	1/16	1.25 [31.8]	0.12 [3]	7/8	5300 [365]	2650 [183]
-6PT-RA-2PT		1/8		0.19 [4.8]			
-6PT-RA-4PT		1/4		0.28 [7.1]			
-8PT-RA-2PT	1/2	1/8	1.50 [38.1]	0.19 [4.8]	1-1/16	4900 [338]	2450 [169]
-8PT-RA-4PT		1/4		0.28 [7.1]			
-8PT-RA-6PT		3/8		0.38 [9.7]			
-12PT-RA-2PT	3/4	1/8	1.56 [39.6]	0.19 [4.8]	1-5/16	4600 [317]	2300 [159]
-12PT-RA-4PT		1/4		0.28 [7.1]			
-12PT-RA-6PT		3/8		0.38 [9.7]			
-12PT-RA-8PT		1/2		0.47 [11.9]			
-16PT-RA-2PT	1	1/8	1.81 [46]	0.19 [4.8]	1-5/8	4400 [303]	2200 [152]
-16PT-RA-4PT		1/4		0.28 [7.1]			
-16PT-RA-6PT		3/8		0.38 [9.7]			
-16PT-RA-8PT		1/2		0.47 [11.9]			
-16PT-RA-12PT		3/4		0.62 [15.7]			
-20PT-RA-16PT	1-1/4	1	2.47 [62.7]	0.88 [22.4]	2	3500 [241]	1750 [121]

See Ordering Information and Technical Specifications on page 2.