


Hex Reducing Nipples

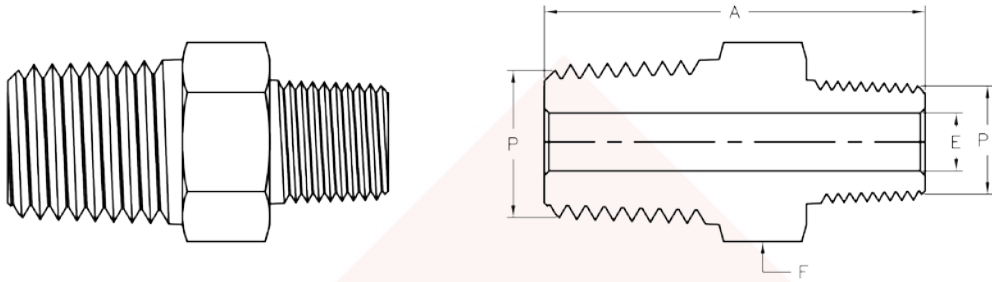


Male NPT

RELYLOK Basic Part No.	P - Male NPT in.	P1 - Male NPT in.	A in. [mm]	E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
						SS & CS	Brass
-2-HRN-1	1/8	1/16	1.01 [25.7]	0.12 [3]	7/16	11000 [758]	5500 [379]
-4-HRN-1	1/4	1/16	1.22 [31]	0.12 [3]	9/16	11000 [758]	5500 [379]
-4-HRN-2		1/8		0.19 [4.8]		10000 [689]	5000 [345]
-6-HRN-1	3/8	1/16	1.25 [31.8]	0.12 [3]	11/16	11000 [758]	5500 [379]
-6-HRN-2		1/8		0.19 [4.8]		10000 [689]	5000 [345]
-6-HRN-4		1/4		0.28 [7.1]		8000 [552]	4000 [276]
-8-HRN-2	1/2	1/8	1.47 [37.3]	0.19 [4.8]	7/8	7700 [531]	3850 [265]
-8-HRN-4		1/4		0.28 [7.1]		8000 [552]	4000 [276]
-8-HRN-6		3/8		0.38 [9.7]		7800 [538]	3900 [269]
-12-HRN-2		1/8		0.19 [4.8]		7300 [503]	3650 [252]
-12-HRN-4	3/4	1/4	1.65 [41.9]	0.28 [7.1]	1-1/16	8000 [552]	4000 [276]
-12-HRN-6		3/8		0.38 [9.7]		7800 [538]	3900 [269]
-12-HRN-8		1/2		0.47 [11.9]		7700 [531]	3850 [265]
-16-HRN-2	1	1/8	1.75 [44.5]	0.19 [4.8]	1-3/8	5300 [365]	2650 [183]
-16-HRN-4		1/4		0.28 [7.1]			
-16-HRN-6		3/8		0.38 [9.7]			
-16-HRN-8		1/2		0.47 [11.9]			
-16-HRN-12		3/4		0.62 [15.7]			
-20-HRN-16	1-1/4	1	2.38 [60.5]	0.88 [22.4]	1-3/4	5300 [365]	2650 [183]
-24-HRN-16	1-1/2	1	2.56 [65]	0.88 [22.4]	2	5300 [365]	2650 [183]
-32-HRN-16	2	1	2.80 [71.1]	0.88 [22.4]	2-3/4	5300 [365]	2650 [183]
10000 psig [689 bar]							
-8-HRN-4-XK	1/2	1/4	1.65 [41.9]	0.23 [5.8]	7/8		

*E is the minimum opening. These fittings may have a larger opening at one end.

See Ordering Information and Technical Specifications on page 2.

Hex Reducing Nipples

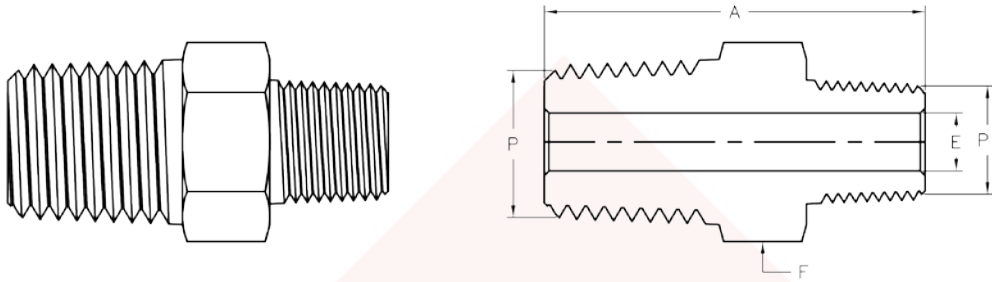

Male BSP/ISO taper (PT)

RELYLOK Basic Part No.	P - Male BSPT/ISOT in.	P1 - Male BSPT/ISOT in.	A in. [mm]	E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
						SS & CS	Brass
						-2PT-HRN-1PT	1/8
-4PT-HRN-1PT	1/4	1/16	1.22 [31]	0.12 [3]	9/16	11000 [758]	5500 [379]
-4PT-HRN-2PT		1/8		0.19 [4.8]		10000 [689]	5000 [345]
-6PT-HRN-1PT	3/8	1/16	1.25 [31.8]	0.12 [3]	11/16	11000 [758]	5500 [379]
-6PT-HRN-2PT		1/8		0.19 [4.8]		10000 [689]	5000 [345]
-6PT-HRN-4PT		1/4		0.28 [7.1]		8000 [552]	4000 [276]
-8PT-HRN-2PT	1/2	1/8	1.47 [37.3]	0.19 [4.8]	7/8	7700 [531]	3850 [265]
-8PT-HRN-4PT		1/4		0.28 [7.1]		8000 [552]	4000 [276]
-8PT-HRN-6PT		3/8		0.38 [9.7]		7800 [538]	3900 [269]
-12PT-HRN-2PT	3/4	1/8	1.47 [37.3]	0.19 [4.8]	1-1/16	7300 [503]	3650 [252]
-12PT-HRN-4PT		1/4		0.28 [7.1]		8000 [552]	4000 [276]
-12PT-HRN-6PT		3/8		0.38 [9.7]		7800 [538]	3900 [269]
-12PT-HRN-8PT		1/2		0.47 [11.9]		7700 [531]	3850 [265]
-16PT-HRN-2PT	1	1/8	1.75 [44.5]	0.19 [4.8]	1-3/8	5300 [365]	2650 [183]
-16PT-HRN-4PT		1/4		0.28 [7.1]			
-16PT-HRN-6PT		3/8		0.38 [9.7]			
-16PT-HRN-8PT		1/2		0.47 [11.9]			
-16PT-HRN-12PT		3/4		0.62 [15.7]			
-20PT-HRN-16PT	1-1/4	1	2.38 [60.5]	0.88 [22.4]	1-3/4	5300 [365]	2650 [183]
-24PT-HRN-16PT	1-1/2	1	2.56 [65]	0.88 [22.4]	2	5300 [365]	2650 [183]
-32PT-HRN-16PT	2	1	2.80 [71.1]	0.88 [22.4]	2-3/4	5300 [365]	2650 [183]
10000 psig [689 bar]							
-8PT-HRN-4PT-XK	1/2	1/4	1.65 [41.9]	0.23 [5.8]	7/8		

*E is the minimum opening. These fittings may have a larger opening at one end.

See Ordering Information and Technical Specifications on page 2.