


## Hex Reducing Couplings

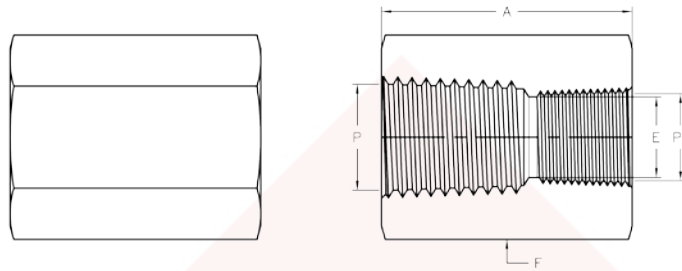


### Female NPT

RELYLOK Basic Part No.	P - Female NPT in.	P1 - Female NPT in.	A in. [mm]	E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
						SS & CS	Brass
-2-HRCG-1	1/8	1/16	0.75 [19.1]	0.25 [6.4]	9/16	6400 [441]	3200 [221]
-4-HRCG-1	1/4	1/16	0.94 [23.9]	0.25 [6.4]	3/4	6600 [455]	3300 [228]
-4-HRCG-2		1/8		0.34 [8.6]			
-6-HRCG-1	3/8	1/16	0.95 [24.1]	0.25 [6.4]	7/8	5000 [345]	2500 [172]
-6-HRCG-2		1/8	1.03 [26.2]	0.34 [8.6]			
-6-HRCG-4		1/4	1.13 [28.7]	0.45 [11.4]			
-8-HRCG-2	1/2	1/8	1.22 [31]	0.34 [8.6]	1-1/16	4900 [338]	2450 [169]
-8-HRCG-4		1/4	1.38 [35.1]	0.45 [11.4]			
-8-HRCG-6		3/8	1.50 [38.1]	0.59 [15]			
-12-HRCG-2	3/4	1/8	1.39 [35.3]	0.34 [8.6]	1-5/16	4600 [317]	2300 [159]
-12-HRCG-4		1/4	1.55 [39.4]	0.45 [11.4]			
-12-HRCG-6		3/8	1.69 [42.9]	0.59 [15]			
-12-HRCG-8		1/2	1.88 [47.8]	0.73 [18.5]			
-16-HRCG-2	1	1/8	1.44 [36.6]	0.34 [8.6]	1-5/8	4400 [303]	2200 [152]
-16-HRCG-4		1/4	1.63 [41.4]	0.45 [11.4]			
-16-HRCG-6		3/8		0.59 [15]			
-16-HRCG-8		1/2	1.77 [45]	0.73 [18.5]			
-16-HRCG-12		3/4	1.72 [43.7]	0.94 [23.9]			
-20-HRCG-16	1-1/4	1	1.94 [49.3]	1.17 [29.7]	2	3500 [241]	1750 [121]
<b>10000 psig [689 bar]</b>							
-8-HRCG-4-XK	1/2	1/4	1.56 [39.6]	0.73 [18.5]	1-1/2	10000 [689]	NA

See Ordering Information and Technical Specifications on page 2.

## Hex Reducing Couplings

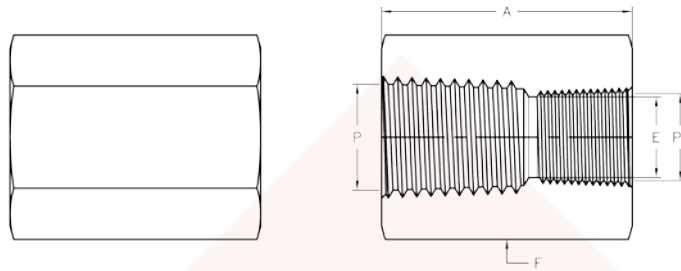

### Female BSP/ISO taper (PT)

RELYLOK Basic Part No.	P - Female BSPT/ISOT in.	P1 - Female BSPT/ISOT in.	A in. [mm]	E in. [mm]	F Hex	Max. Working Pressure psig [bar]	
						SS & CS	Brass
						-2PT-HRCG-1PT	1/8
-4PT-HRCG-1PT	1/4	1/16	0.94 [23.9]	0.25 [6.4]	3/4	6600 [455]	3300 [228]
-4PT-HRCG-2PT		1/8		0.34 [8.6]			
-6PT-HRCG-1PT	3/8	1/16	0.95 [24.1]	0.25 [6.4]	7/8	5000 [345]	2500 [172]
-6PT-HRCG-2PT		1/8	1.03 [26.2]	0.34 [8.6]			
-6PT-HRCG-4PT		1/4	1.13 [28.7]	0.45 [11.4]			
-8PT-HRCG-2PT	1/2	1/8	1.22 [31]	0.34 [8.6]	1-1/16	4900 [338]	2450 [169]
-8PT-HRCG-4PT		1/4	1.38 [35.1]	0.45 [11.4]			
-8PT-HRCG-6PT		3/8	1.50 [38.1]	0.59 [15]			
-12PT-HRCG-2PT	3/4	1/8	1.39 [35.3]	0.34 [8.6]	1-5/16	4600 [317]	2300 [159]
-12PT-HRCG-4PT		1/4	1.55 [39.4]	0.45 [11.4]			
-12PT-HRCG-6PT		3/8	1.69 [42.9]	0.59 [15]			
-12PT-HRCG-8PT		1/2	1.88 [47.8]	0.73 [18.5]			
-16PT-HRCG-2PT	1	1/8	1.44 [36.6]	0.34 [8.6]	1-5/8	4400 [303]	2200 [152]
-16PT-HRCG-4PT		1/4	1.63 [41.4]	0.45 [11.4]			
-16PT-HRCG-6PT		3/8		0.59 [15]			
-16PT-HRCG-8PT		1/2	1.77 [45]	0.73 [18.5]			
-16PT-HRCG-12PT		3/4	1.72 [43.7]	0.94 [23.9]			
-20PT-HRCG-16PT	1-1/4	1	1.94 [49.3]	1.17 [29.7]	2	3500 [241]	1750 [121]
<b>10000 psig [689 bar]</b>							
-8PT-HRCG-4PT-XK	1/2	1/4	1.56 [39.6]	0.73 [18.5]	1-1/2	10000 [689]	NA

See Ordering Information and Technical Specifications on page 2.