


Male Branch Tees

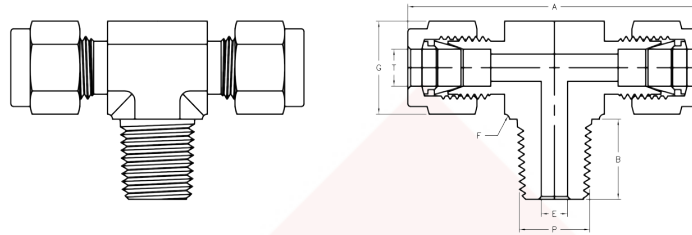

Fractional tube to NPT

RELYLOK Basic Part No.	T Tube O.D.	P NPT Thread	A in. [mm]	B in. [mm]	E in. [mm]	F Hex	G Hex
-2-31B-2	1/8	1/8	1.86 [47.2]	0.38 [9.7]	0.09 [2.3]	7/16	7/16
-2-31B-4		1/4	1.94 [49.3]	0.56 [14.2]		9/16	
-3-31B-2	3/16	1/8	1.92 [48.8]	0.38 [9.7]	0.12 [3]	1/2	1/2
-4-31B-2	1/4	1/8	2.12 [53.8]	0.38 [9.7]	0.19 [4.8]	1/2	9/16
-4-31B-4		1/4		0.56 [14.2]		9/16	
-5-31B-2	5/16	1/8	2.34 [59.4]	0.38 [9.7]	0.19 [4.8]	9/16	5/8
-5-31B-4		1/4	2.35 [59.7]	0.56 [14.2]	0.25 [6.4]		
-6-31B-4	3/8	1/4	2.40 [61]	0.56 [14.2]	0.28 [7.1]	5/8	11/16
-6-31B-6		3/8	2.62 [66.5]			11/16	
-8-31B-6	1/2	3/8	2.84 [72.1]	0.56 [14.2]	0.38 [9.7]	13/16	7/8
-8-31B-8		1/2		0.75 [19.1]	0.41 [10.4]	7/8	
-10-31B-8	5/8	1/2	3.06 [77.7]	0.75 [19.1]	0.47 [11.9]	15/16	1
-12-31B-12	3/4	3/4	3.14 [79.8]	0.75 [19.1]	0.62 [15.7]	1 1/16	1 1/8
-14-31B-12	7/8	3/4	3.52 [89.4]	0.75 [19.1]	0.62 [15.7]	1 1/4	1 1/4
-16-31B-12	1	3/4	3.88 [98.6]	0.75 [19.1]	0.62 [15.7]	1 3/8	1 1/2
-16-31B-16		1		0.94 [23.9]	0.88 [22.4]		

Metric tube to NPT

RELYLOK Basic Part No.	T Tube O.D.	P NPT Thread (in.)	A mm.	B mm.	E mm.	F Hex (in.)	G Hex
-M3-31B-2	3	1/8	47.2	9.7	2.4	7/16	11
-M3-31B-4		1/4	49.3	14.2		9/16	
-M4-31B-2	4	1/8	48.8	9.7	2.4	1/2	12
-M6-31B-2	6	1/8	53.8	9.7	4.8	1/2	14
-M6-31B-4		1/4		14.2		9/16	
-M8-31B-2	8	1/8	59.4	9.7	4.8	9/16	16
-M8-31B-4		1/4		14.2	6.4		
-M10-31B-4	10	1/4	67.0	14.2	7.1	11/16	19
-M10-31B-6		3/8			7.9		
-M12-31B-4	12	1/4	72.0	14.2	7.1	13/16	22
-M12-31B-6		3/8			7.9		
-M12-31B-8		1/2			19.0	9.5	
-M16-31B-8	16	1/2	77.7	19.0	11.9	15/16	25

See Ordering Information and Technical Specifications on page 2.