



Caps

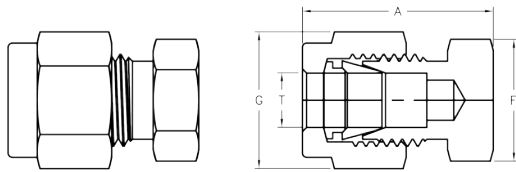

Plugs

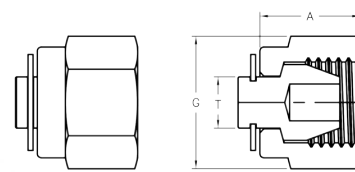

Fractional tube

| RELYLOK Basic Part No. | T Tube O.D. | A in. [mm] | F Hex | G Hex |
|------------------------------|-------------------|---------------|----------|----------|
| -1-C | 1/16 | 0.59 [15] | 5/16 | 5/16 |
| -2-C | 1/8 | 0.79 [20.1] | 7/16 | 7/16 |
| -3-C | 3/16 | 0.84 [21.3] | 7/16 | 1/2 |
| -4-C | 1/4 | 0.92 [23.4] | 1/2 | 9/16 |
| -5-C | 5/16 | 0.96 [24.4] | 9/16 | 5/8 |
| -6-C | 3/8 | 1.01 [25.7] | 5/8 | 11/16 |
| -8-C | 1/2 | 1.21 [30.7] | 13/16 | 7/8 |
| -10-C | 5/8 | 1.24 [31.5] | 15/16 | 1 |
| -12-C | 3/4 | 1.27 [32.3] | 1 1/16 | 1 1/8 |
| -14-C | 7/8 | 1.37 [34.8] | 1 3/16 | 1 1/4 |
| -16-C | 1 | 1.61 [40.9] | 1 3/8 | 1 1/2 |

Fractional tube

| RELYLOK Basic Part No. | T Tube O.D. | G Hex |
|------------------------------|-------------------|----------|
| -1-P | 1/16 | 5/16 |
| -2-P | 1/8 | 7/16 |
| -3-P | 3/16 | 1/2 |
| -4-P | 1/4 | 9/16 |
| -5-P | 5/16 | 5/8 |
| -6-P | 3/8 | 11/16 |
| -8-P | 1/2 | 7/8 |
| -10-P | 5/8 | 1 |
| -12-P | 3/4 | 1 1/8 |
| -14-P | 7/8 | 1 1/4 |
| -16-P | 1 | 1 1/2 |

Metric tube

| RELYLOK Basic Part No. | T Tube O.D. | A mm. | F Hex | G Hex |
|------------------------------|-------------------|----------|----------|----------|
| -M2-C | 2 | 20.1 | 11 | 11 |
| -M3-C | 3 | 20.1 | 11 | 11 |
| -M4-C | 4 | 21.3 | 11 | 12 |
| -M6-C | 6 | 23.1 | 14 | 14 |
| -M8-C | 8 | 24.5 | 14 | 16 |
| -M10-C | 10 | 26.6 | 17 | 19 |
| -M12-C | 12 | 30.6 | 22 | 22 |
| -M14-C | 14 | 31.4 | 24 | 25 |
| -M15-C | 15 | 31.4 | 24 | 25 |
| -M16-C | 16 | 31.4 | 24 | 25 |
| -M18-C | 18 | 32.2 | 27 | 30 |
| -M20-C | 20 | 34.8 | 30 | 32 |
| -M22-C | 22 | 34.8 | 30 | 32 |
| -M25-C | 25 | 41.0 | 35 | 38 |

Metric tube

| RELYLOK Basic Part No. | T Tube O.D. | G Hex |
|------------------------------|-------------------|----------|
| -M2-P | 2 | 11 |
| -M3-P | 3 | 11 |
| -M4-P | 4 | 12 |
| -M6-P | 6 | 14 |
| -M8-P | 8 | 16 |
| -M10-P | 10 | 19 |
| -M12-P | 12 | 22 |
| -M14-P | 14 | 25 |
| -M15-P | 15 | 25 |
| -M16-P | 16 | 25 |
| -M18-P | 18 | 30 |
| -M20-P | 20 | 32 |
| -M22-P | 22 | 32 |
| -M25-P | 25 | 38 |

See Ordering Information and Technical Specifications on page 4.