


Male Run Tees

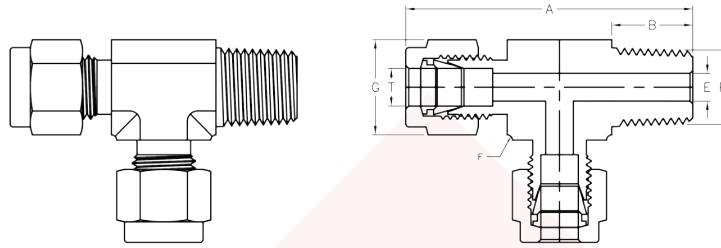

Fractional tube to NPT

RELYLOK Basic Part No.	T Tube O.D.	P NPT Thread	A in. [mm]	B in. [mm]	E in. [mm]	F Hex	G Hex
-2-31R-2	1/8	1/8	1.63 [41.4]	0.38 [9.7]	0.09 [2.3]	7/16	7/16
-2-31R-4		1/4	1.89 [48]	0.56 [14.2]		9/16	
-3-31R-2	3/16	1/8	1.66 [42.2]	0.38 [9.7]	0.12 [3]	1/2	1/2
-4-31R-2	1/4	1/8	1.80 [45.7]	0.38 [9.7]	0.19 [4.8]	1/2	9/16
-4-31R-4		1/4	1.98 [50.3]	0.56 [14.2]		9/16	
-5-31R-2	5/16	1/8	1.99 [50.5]	0.38 [9.7]	0.19 [4.8]	9/16	5/8
-5-31R-4		1/4	2.18 [55.4]	0.56 [14.2]	0.25 [6.4]		
-6-31R-4	3/8	1/4	2.20 [55.9]	0.56 [14.2]	0.28 [7.1]	5/8	11/16
-6-31R-6		3/8	2.42 [61.5]			11/16	
-8-31R-6	1/2	3/8	2.53 [64.3]	0.56 [14.2]	0.38 [9.7]	13/16	7/8
-8-31R-8		1/2	2.72 [69.1]	0.75 [19.1]	0.41 [10.4]	7/8	
-10-31R-	5/8	1/2	2.88 [73.2]	0.75 [19.1]	0.47 [11.9]	15/16	1
-12-31R-12	3/4	3/4	3.02 [76.7]	0.75 [19.1]	0.62 [15.7]	1 1/16	1 1/8
-14-31R-12	7/8	3/4	3.41 [86.6]	0.75 [19.1]	0.62 [15.7]	1 1/4	1 1/4
-16-31R-12	1	3/4	3.59 [91.2]	0.75 [19.1]	0.62 [15.7]	1 3/8	1 1/2
-16-31R-16		1	3.78 [96]	0.94 [23.9]	0.88 [22.4]		

Metric tube to NPT

RELYLOK Basic Part No.	T Tube O.D.	P NPT Thread (in.)	A mm.	B mm.	E mm.	F Hex (in.)	G Hex
-M3-31R-2	3	1/8	41.4	9.7	2.4	7/16	11
-M3-31R-4		1/4	48.0	14.2		9/16	
-M4-31R-2	4	1/8	42.2	9.7	2.4	1/2	12
-M6-31R-2	6	1/8	45.8	9.7	4.8	1/2	14
-M6-31R-4		1/4	50.3	14.2		9/16	
-M8-31R-2	8	1/8	50.5	9.7	4.8	9/16	16
-M8-31R-4		1/4	55.3	14.2	6.4		
-M10-31R-4	10	1/4	55.9	14.2	7.1	11/16	19
-M10-31R-6		3/8	61.7		7.9		
-M10-31R-8		1/2	66.5			19.0	
-M12-31R-4	12	1/4	64.2	14.2	7.1	13/16	22
-M12-31R-6		3/8			7.9		
-M12-31R-8		1/2			69.0	19.0	
-M16-31R-8	16	1/2	73.1	19.0	11.9	15/16	25
-M16-31R-16		1	93.1	23.9	12.7	1-3/8	

See Ordering Information and Technical Specifications on page 4.