
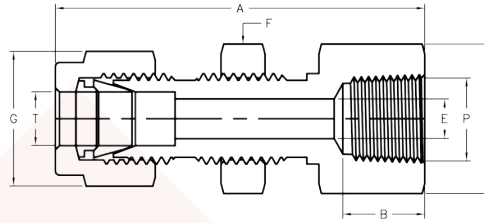


Bulkhead Female Connectors

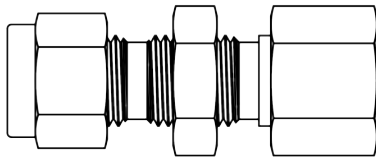

Fractional tube to NPT

RELYLOK Basic Part No.	T Tube O.D.	P NPT Thread	A in. [mm]	B in. [mm]	E in. [mm]	F Hex	G Hex	Panel Hole Size	Max. Panel Thickness in. [mm]
-2-121-2	1/8	1/8	1.76 [44.7]	0.41 [10.4]	0.09 [2.3]	9/16	7/16	21/64	0.50 [12.7]
-3-121-2	3/16	1/8	1.79 [45.5]	0.41 [10.4]	0.12 [3]	9/16	1/2	25/64	0.50 [12.7]
-4-121-2	1/4	1/8	1.85 [47]	0.41 [10.4]	0.19 [4.8]	5/8	9/16	29/64	0.40 [10.2]
-4-121-4		1/4	2.04 [51.8]	0.59 [15]		3/4			
-5-121-2	5/16	1/8	1.96 [49.8]	0.41 [10.4]	0.25 [6.4]	11/16	5/8	33/64	0.44 [11.2]
-5-121-8		1/2	2.38 [60.5]	0.78 [19.8]		1 1/16			
-6-121-4	3/8	1/4	2.17 [55.1]	0.59 [15]	0.28 [7.1]	3/4	11/16	37/64	0.44 [11.2]
-8-121-6	1/2	3/8	2.43 [61.7]	0.59 [15]	0.41 [10.4]	15/16	7/8	49/64	0.50 [12.7]
-8-121-8		1/2	2.62 [66.5]	0.78 [19.8]		1 1/16			
-10-121-	5/8	1/2	2.65 [67.3]	0.78 [19.8]	0.50 [12.7]	1 1/16	1	57/64	0.59 [15]
-12-121-12	3/4	3/4	2.90 [73.7]	0.81 [20.6]	0.62 [15.7]	1 3/8	1 1/8	1 1/64	0.66 [16.8]
-14-121-12	7/8	3/4	3.18 [80.8]	0.81 [20.6]	0.72 [18.3]	1 3/8	1 1/4	1 9/64	0.75 [19.1]
-16-121-16	1	1	3.69 [93.7]	1.00 [25.4]	0.88 [22.4]	1 5/8	1 1/2	1 21/64	0.75 [19.1]

Metric tube to NPT

RELYLOK Basic Part No.	T Tube O.D.	P NPT Thread (in.)	A mm.	B mm.	E mm.	F Hex	G Hex	Panel Hole Size	Max Panel Thickness mm.
-M6-121-2	6	1/8	47.2	10.4	4.8	16	14	11.5	10.2
-M6-121-4		1/4	52.0	15.0		19			
-M8-121-2	8	1/8	49.6	10.4	6.4	18	16	13.1	11.2
-M10-121-4	10	1/4	55.2	15.0	7.9	19	19	16.3	11.2
-M12-121-6	12	3/8	60.9	15.0	10.4	27	22	19.5	12.7
-M12-121-8		1/2	66.4	19.8					

See Ordering Information and Technical Specifications on page 2.